


Patch Cable RJ45 FlexBoot Cat. 6, Class E_A, Shielded

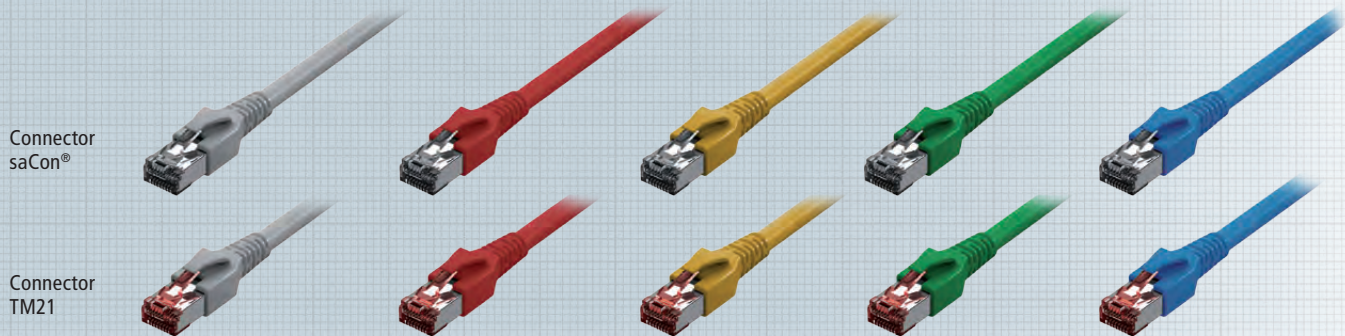

Connection cable RJ45/RJ45, shielded 1:1 pinout and featuring Hirose TM21 plugs and FlexBoot® boot. This patch cable is suitable for installation in offices, data centers and industrial facilities.

Standards:

IEEE 802.3; 10BaseT; 100BaseT; 1000BaseT; 10GBaseT;
IEEE 802.5 16MB; ISDN; ATM; Telephone

Properties:

Sheath	FRNC: IEC 60332-1-2; IEC 60754-2; IEC 61034
Boot color EMC	yellow, green, blue, red, magenta, orange PiMf / Connector conforms to EN 60603-7 with 360° shielding
Approved connectors	saCon®, TM21,
Electrical specifications	Cat. 6A, class E _A , 500 MHz, suitable for data transmission
Chemical properties	Free of hazardous substances pursuant to RoHS 2002/95/EC
Packaging unit	up to 3m in length: 10 units in polybag; 3.01 - 5m in length: 5 units in polybag; over 5m: packed individually
Length key	last four digits in ordering code = length of cord in dm

Description	Ordering Code
Patch Cable Cat. 6, saCon® plug 1:1 FlexBoot, gray	CP1KADADxxxx
Patch Cable Cat. 6, saCon® plug 1:1 FlexBoot, red	CP1KRDRDRxxxx
Patch Cable Cat. 6, saCon® plug 1:1 FlexBoot, yellow	CP1KYDYDYxxxx
Patch Cable Cat. 6, saCon® plug 1:1 FlexBoot, green	CP1KGDGDGxxxx
Patch Cable Cat. 6, saCon® plug 1:1 FlexBoot, blue	CP1KBDBDBxxxx

xxxx = length in dm

Description	Ordering Code
Patch Cable FlexBoot Cat. 6 Hirose TM21 1:1, gray	CP1KAKAKAxxxx
Patch Cable FlexBoot Cat. 6 Hirose TM21 1:1, red	CP1KRKRKRxxxx
Patch Cable FlexBoot Cat. 6 Hirose TM21 1:1, yellow	CP1KYRYRYxxxx
Patch Cable FlexBoot Cat. 6 Hirose TM21 1:1, green	CP1KGRGRGxxxx
Patch Cable FlexBoot Cat. 6 Hirose TM21 1:1, blue	CP1KBRBRBxxxx

xxxx = length in dm